

JERZY CEGŁA, STANISŁAW DŻUŁYŃSKI

DOŚWIADCZENIA NAD PRZEŁAMEM PIERZASTYM W OSADACH

(Tabl. XXXIII, XXXIV i 4 fig.)

*Experiments on feather fracture in sediments
(Pl. XXXIII, XXXIV and 4 Figs.)*

STRESZCZENIE

Na powierzchniach niektórych spękań w skałach występują często drobne, listewkowe nierówności ułożone w pierzaste wzory (tabl. XXXIII, fig. 1, 2, tabl. XXXIV, fig. 1). Struktury owe, opisane po raz pierwszy przez Woodwortha (1897) pod nazwą „feather fracture”, znane są głównie z powierzchni spękań ciosowych. Stąd wywodzą się używane w polskim piśmiennictwie naukowym określenia: „cios pierzasty” (Książkiewicz, 1966) lub „relief pierzasty na spękanach ciosowych” (Boretti-Onyszkiewicz, 1967).

Struktury pierzaste pojawiają się jednak również często na powierzchniach nieregularnych spękań lub obrywów w nie utwardzonych jeszcze osadach czwartorzędowych i współczesnych, a także na ścianach szczelin z wysychania (fig. 2 i 3). Struktury te są pewnym rodzajem przełamu zadzierzystego, który określać będziemy nazwą przełamu pierzastego.

Bardzo podobne przełamy pierzaste znane są z powierzchni rozerwań w metalach poddawanych rozciąganiu, jak również w niektórych, „kruchych” tworzywach niemetalicznych, jak np. w szkle lub w oziębionej do niskich temperatur parafinie.

Prawidłowe rozwiążanie pochodzenia przełamu pierzastego podał już Woodworth (1897), przyjmując, iż przełam ten powstaje w wyniku rozrywania tensjonalnego bez przesunięć wzdłuż płaszczyzny pęknięcia. Wyżej wymieniony autor ustalił również zależność, jaka istnieje między kierunkiem rozprzestrzeniania się szczelin a ułożeniem struktur pierzastych. Wykazał on, iż owe pierzaste struktury rozchodzą się wachlarzowo z punktu lub z osi w kierunku rozprzestrzeniania się szczeliny. Ostatnio wysunięto jednak pogląd odmienny, według którego pierzaste listewki na powierzchniach spękań mogłyby również zbiegać się w kierunku rozprzestrzeniania się szczelin (Hill, 1965, 1966), a więc odwrotnie, niż to przyjmowali Woodworth i jego następcy.

W związku z zaistniałymi wątpliwościami w odniesieniu do znaczenia kierunkowego przełamu pierzastego, autorowie przeprowadzili szereg prostych doświadczeń, posługując się jako tworzywem modelowym, drobnoziarnistym, zailonym i wilgotnym piaskiem, a więc tym rodzajem osadu, w którym we współczesnych i czwartorzędowych utworach najczęściej pojawia się przełam pierzasty. Wyniki doświadczeń zostały w sposób

uproszczony przedstawione na fig. 4. Okazało się, iż układ struktur pierzastych jednoznacznie wskazuje na kierunek rozprzestrzeniania się szczezin tensjonalnych, i to we wszystkich przypadkach zgodnie z prawidłowością wykrytą przez W o o d w o r t h a.

*Instytut Geografii PAN
Zakład Geomorfologii
w Krakowie*

A b s t r a c t; The results of experiments on the fracture of moist sands and silts are given. The surfaces of the fractures discussed display feather fracture similar to that observed on joint surfaces of rocks. The „feathers” diverge from regions of stress concentration, that is from the areas or points of origin of fractures, and extend in the direction of fracture propagation. The feather fracture results from tensile forces acting upon a rock which is in the state of transition from ductile to brittle behaviour.

Feather fracture (W o o d w o r t h, 1897, „plumose markings” of P a r k e r, 1942) is a common splitting figure on joint surfaces. It consists of minute hackly ridges of very low relief, diverging from a point or indistinct axis on the faces of joint blocks (Pl. XXXIV, Fig. 1, Textfig. 1). The feather pattern on two opposing joint walls is complementary and interlocking, since the „feathers” are the splitting figures themselves (W o o d w o r t h, 1897; P a r k e r, 1942; H o d g s o n 1961, 1961a).

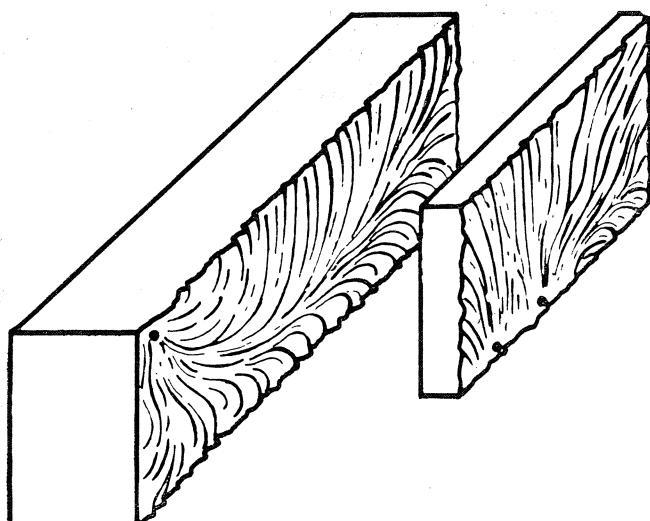


Fig. 1. Różne układy struktur pierzastych na sąsiednich i równoległych powierzchniach ciosowych. Kropkami oznaczono miejsca rozchodzenia się szczezin. Rysunek według okazu z fot. 1 Pl. XXXIV

Fig. 1. Two parallel and neighbouring joint surfaces showing different feather patterns. Dots mark the points from which the fractures started

The feather fracture in sedimentary rocks is not limited to the surfaces of true joints which occur in parallel sets. It appears on various parting surfaces which are irregular and curved. Furthermore, the feather fracture occurs on the faces of contraction joints in volcanic rocks (W o o d w o r t h, 1897), on the surfaces of disjunctive cracks developed in semi-consolidated Recent and Pleistocene silts (Pl. XXXIII, Figs. 1, 2), and on the surfaces of desiccation (Pl. XXXIII, Fig. 2 Textfig. 2 and 3) and infiltration cracks¹.

¹ i.e. cracks formed by liquid infiltration into dry powdered medium (see C e g ła et. al., 1967).

Although the origin of feather fracture in rocks is not yet clearly understood, it is widely agreed that the presence of „feathers” is indicative of lateral separation of joint blocks normal to the surface of fracture (Woodworth, 1897; Muehlberger, 1961; Roberts, 1961 a, b; Hodgson, 1961 a, b; Hill, 1965). Indeed, feather fracture is never associated with slickensides tectoglyphs² or rock-polish (Woodworth, 1897).

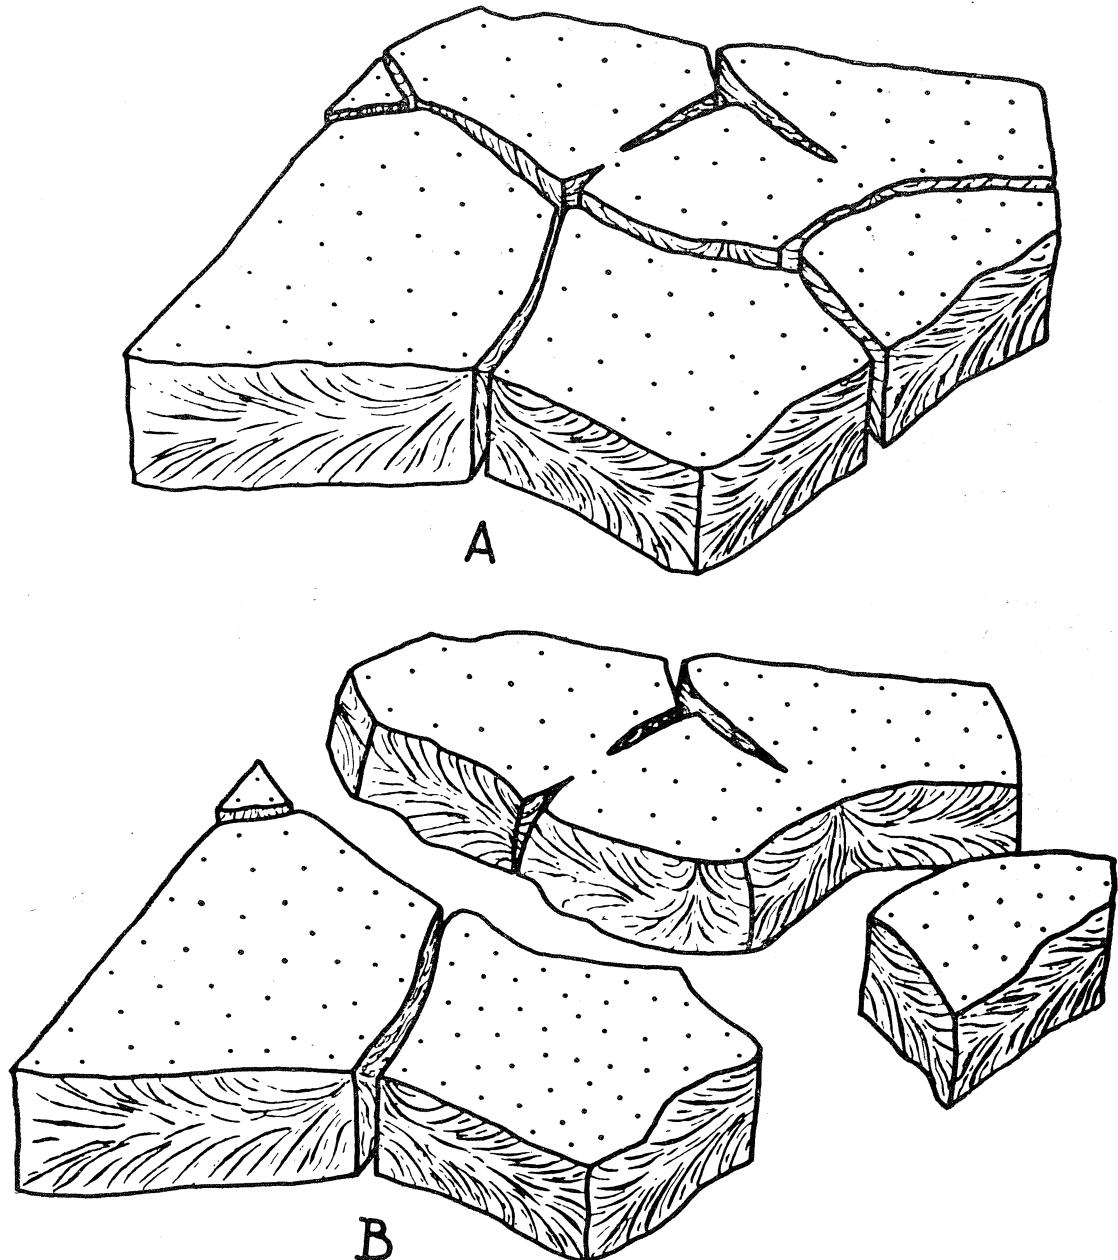


Fig. 2. Przełam pierzasty na ściankach wielobocznych szczelin z wysychania
Fig. 2. Feather fracture on the surfaces of polygonal drying cracks

Feather fracture appears to be closely allied to the so called „shatter cones” (see for example Dietz, 1961, Pl. I; and Woodland, 1964, Fig. 25), and to a number of discoidal fractures with „percussion rays”

² Care should be taken not to confuse feather fracture with morphologically similar tectoglyphs indicated as „tectonic chevrons” (Dżułyński and Kotlarczyk, 1965).

(Woodworth, 1897, Pl. 5, Fig. 3, Raggatt, 1954, Fig. 1) or to „hackle marks” of Solomon and Hill (1962). It has been also observed that some „brittle” materials in tension, such as glass or cooled paraffin, develop a similar kind of fracture (Woodworth, 1897; Sheldon, 1912).

Important for the explanation of feather fracture in rocks is the analogy with the „herringbone fracture” displayed by fatigue and static

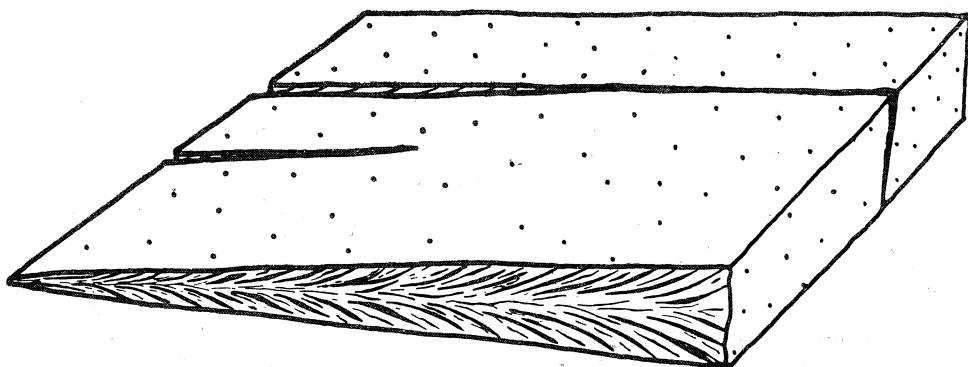


Fig. 3. Przełam pierzasty na równoległych szczelinach z wysychania. Kierunek rozprzestrzeniania się szczeliny od lewej ku prawej

Fig. 3. Consistent orientation of feathers on the surfaces of parallel drying cracks. Fracture started at the left side

tension ruptures in metals (see Bridgeman, 1912 Fig. 8; Nadaï, 1950 Fig. 15—11). The significance of this analogy lies in the implication of similarity of causes and some common sets of physical factors for both, the „herringbone fracture” in metals and the feather fracture in rocks (Roberts, 1961; Boretti-Onyszkiewicz, 1967).

The herringbone fracture in metals results from relatively rapid separation, perpendicular to the fracture surface. The mechanism involved in the formation of this type of fracture is not yet completely understood. There is, however, little doubt that the „arrows” in the herringbone pattern in metals (which correspond to the „barbs” of feathers in the feather fracture in rocks) point in the direction from which the tensional cracks originated (Nadaï, 1950).

A divergence of opinions has been recently expressed concerning the question of directional significance of similar features exhibited by the feather fracture in rocks. Most authors following Woodworth (1897) proceed from the assumption that the feathers diverge in the direction of splitting, and that they are „concave to the point of origin of the fracture” (Woodworth, 1897 p. 166). However, Hill (1965, 1966) suggested another possibility, namely that some feather fractures might have propagate concave edge forward, i.e. the feather barbs may converge in the direction of fracture propagation. Another controversial question is, whether the feather fracture is necessarily indicative of „rapid separation of medium which proceeded with a high rate of propagation” as assumed by Roberts (1961, p. 489). According to Roberts, slow fracturing inhibits the formation of feather patterns. This assumption, however, is incompatible with occurrences of feather fracture on the faces of drying cracks (Textfig. 2 and 3) and other divisional surfaces in soft, semi-consolidated sediments.

The present series of experimental investigations was begun with

a view to testing this premise and was conducted on materials so chosen as to have similar mechanical properties to natural silts showing feather fracture.

The tests were performed on silts and fine silty sands of uniform grain-size which were settled from dense watery suspensions in cardboard boxes. The removal of excess water through the permeable cardboard walls gave a suitable model material containing just enough interstitial water to ensure dilatant behaviour. After the removal of the cardboard walls, the settled sand bodies retained the shape of orthogonal slabs. These were subjected to tensile stresses up to the point of failure.

The results of the tests are as follows:

1) With slight bending of the slab, open fractures started to form at a number of points along the crest of the deformed slab. These incipient cracks became the regions from which the diverging feathers were observed to propagate downwards, concomittantly with a slow propagation of cracks in this direction (Textfig. 4 A).

2) If bending was accompanied by unidirectional progressive splitting, as illustrated on Fig. 4B, the feathers which started to radiate from the incipient crack, deviated laterally in the direction of progressing fracture (Textfig. 4 B, Pl. XXXIV, Fig. 4).

3) If unidirectional splitting exclusively was applied, and in such a way that the incipient fracture developed first on one side of the slab only, and then progressed laterally towards the other side (Textfig. 4C, Pl. XXXIV, Fig. 3), a feather fracture resulted with the axis trending roughly parallel to the top and bottom surfaces of the slab (Pl. XXXIV, Fig. 3).

4) If tensional stress was applied so as to produce two incipient cracks on the opposite sides of the slab (Fig. 4 D), and then these cracks started to propagate towards each other, the „reversed feather fracture” of Woodworth was formed.

Thus it is apparent that the feather fracture provides a reliable criterion for determining the direction of fracture propagation. The feathers diverge always in the direction of fracture propagation, in agreement with the view set forth by Woodworth (1897).

Rapid separation is apparently not a necessary condition for the formation of feather fractures. These splitting figures may form with slowly propagating cracks, depending on the mechanical properties of the material fractured. Dry slabs, when acted upon by tensile stresses, broke down without discernible feather fracture. In such cases the separation progressed rapidly and the incipient fractures were instantaneously transmitted from a great number of points. It appears that the delayed propagation of fractures favours, while the rapid progression and instantaneous formation of a multitude of incipient cracks inhibits the formation of feather fracture. It should be borne in mind, however, that the speed at which the cracks move is determined by the mechanical properties of the material (Hardy, 1959).

In the experiments discussed, the fractured materials were in elasto-plastic state, and showed the mechanical properties which were transitional from ductile to brittle behaviour. This is presumably another factor favouring the formation of feather fracture. Soft, water-saturated sediments may show the transitional behaviour under atmospheric pressure. More indurated rocks would respond in the same manner under confining pressure.

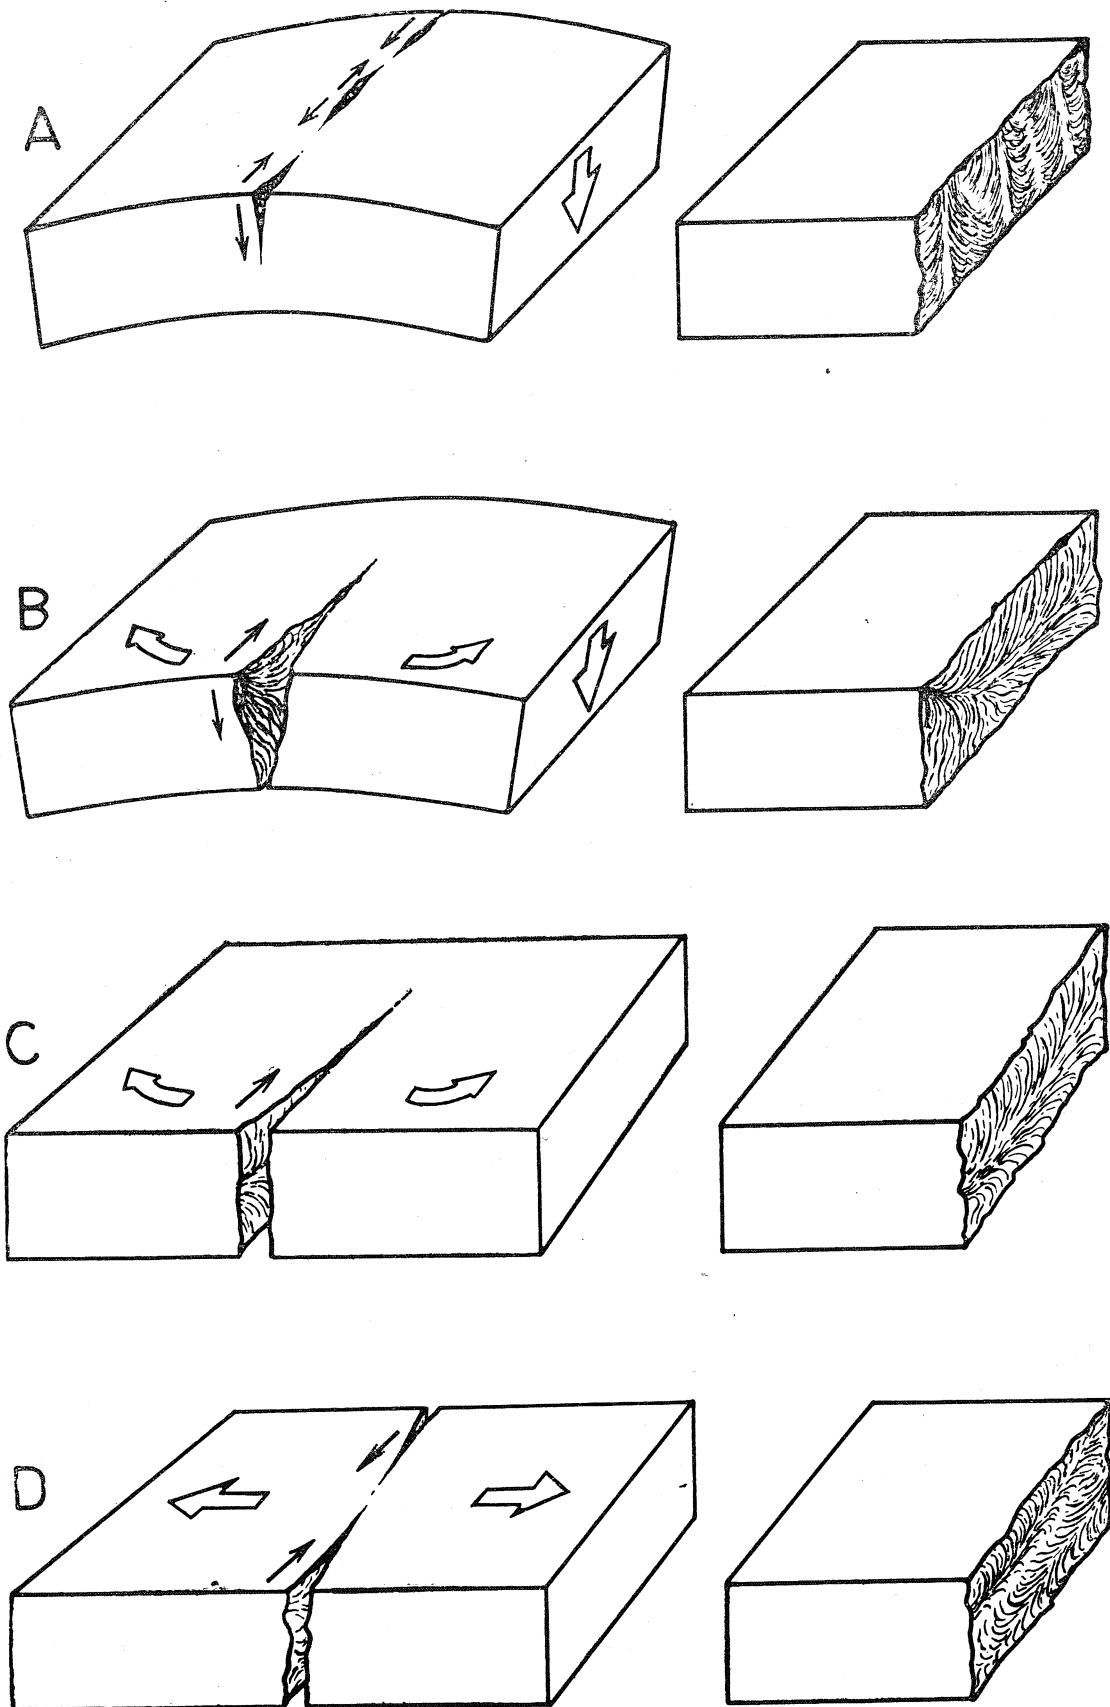


Fig. 4. Układ struktur pierzastych w zależności od sposobu odkształcania. Objaśnienia w tekście

Fig. 4. Different orientation of feathers depending on the manner in which the tensional force is applied. Explanation in text

Feather fracture commonly begins on external surfaces of the slabs under test. However, the axes of feathers starting from points on the top or bottom surfaces of slabs tend to deviate from their incipient vertical course, and trend parallel to these surfaces. This behaviour, conspicuous in thin slabs, accounts for the predominance of parallel orientation of feather axes with respect to bedding surfaces, as observed on natural joint planes.

It is to be noted that fractures may be initiated either on top or bottom surfaces of slabs in the absence of bending, and result from simple lateral tension. This is a characteristic property of tensile fracture in the so-called „brittle” materials subjected to tensile stresses (Bridgman, 1952). As indicated by Hill (1965) small „imperfections” on bedding surfaces of rocks may prove to be important in the initiation of fractures.

The appearance of feather fracture is a reliable, though not exclusive¹, criterion of rupture by tension in a plane which perpendicular to the direction of tension. It is, however, indicative of neither the external conditions under which the fracturing is accomplished nor the type of the forces which precede the final rupture (see Roberts, 1961). This is already evident from the fact that feather fracture is equally common on the surfaces of drying cracks as on the fracture surfaces in specimens tested in pure bending or static tension.

Feather fracture shows, however, the manner in which the fractures were initiated and propagated, and therefore may furnish a valuable clue to the early deformational history of rocks.

It should finally be noted that measurements of the orientation of feather fracture on joint faces offers a possibility to explain the origin of some of the joint systems for which no satisfactory mechanical explanation has been advanced.

Acknowledgements. The investigations were made in the Department of Geology of the Jagiellonian University in Cracow and the authors are greatly indebted to Professor M. K s i ą ɻ k i e w i c z for providing all facilities and for critical reading of a draft of the manuscript and many helpful suggestions.

*Institute of Geography,
Polish Academy of Sciences
Department of Geomorphology
in Cracow*

WYKAZ LITERATURY REFERENCES

- B o r e t t i - O n y s z k i e w i c z W. (1967), Diaklasy we fliszu Podhala zachodniego w świetle badań wytrzymałościowych. *Acta geol. pol.*, 17, w druku (in press).
- B r i d g m a n P. W. (1912), Breaking tests under hydrostatic pressure and conditions of rupture. *Phil. Mag.*, VI-th Series, 24, pp. 63—80.

¹ Depending on the mechanical properties of the materials subjected to tensile stresses, the tensile fractures may exhibit clean-cut, smooth surfaces (N a d a i, 1950; H a r d y, 1959).

- Bridgeman P. W. (1952), Studies in large plastic flow and fracture. Metallurgy and Metallurgical Engineering Series, McGraw-Hill Book Comp., INC., p. 362.
- Ceglà J., Dżułyński St., Kwiatkowski St. (1967), Fractures resulting from liquid infiltration into dry powdered materials. *Bull. Pol. Acad. Sc. Ser. geol.-geogr.*, vol. 15, no. 2, pp. 83—88.
- Dietz R. S. (1961), Vredefort Ring Structure; Meteorite Impact Scar?, *J. Geol.*, 69, pp. 499—516.
- Dżułyński St., Kotlarczyk J. (1965), Tectoglyphs on Slickensided Surfaces. *Bull. Pol. Acad. Sc., Ser. geol.-geogr.*, 13, no. 2, pp. 149—154.
- Hardy H. R. (1959), Time-dependent deformation and failure of geologic materials. *Quarterly of the Colorado School of Mines, Third Symposium on Rock Mechanics*, 54, no. 3, pp. 135—216.
- Hill P. A. (1965), Curviplanar (Radial, Bow-Tie, Festoon) and Concentric Jointing in Jurassic Dolerite Mersey Bluff, Tasmania. *J. Geol.*, 73, pp. 255—270.
- Hill P. A. (1966), Joints: Their Initiation and Propagation with Respect to Bedding. *Geol. Mag.*, 103, no. 3, pp. 276—279.
- Hodgson R. A. (1961), Regional study of jointing in Comb Ridge-Navajo Mountain Area, Arizona and Utah, Am. Assoc. Petrol. Geol. Bull., 45, no. 1, pp. 1—38.
- Hodgson R. A. (1961 a), Classification of structures on joint surfaces. *Amer. J. Sc.*, 259, pp. 493—502.
- Książkiewicz M. (1966), Przewodnik XXXIX Zjazdu P.T.G., Babia Góra (Itinéraire de l'excursion de la 39-ème Réunion de la Société Géologique de Pologne dans la région de Babia Góra). *Wyd. Geol.*, Warszawa, p. 103.
- Muehlberger W. R. (1961), Conjugate joint sets of small dihedral angle. *J. Geol.*, 69, pp. 211—219.
- Nadaï A. (1950), Theory of Flow and Fracture of Solids, Engineering Societies Monograph, McGraw-Hill Book Comp., Inc., New York Toronto and London, p. 572.
- Parker J. M. (1942), Regional systematic jointing in slightly deformed sedimentary rocks, *Geol. Soc. Amer. Bull.*, 53, pp. 381—408.
- Raggat H. G. (1954), Markings on joint surfaces at Anglesea, Victoria, Amer. Assoc. Petrol. Geol. Bull., 38, pp. 1808—1809.
- Roberts J. C. (1961), Feather fracture and the mechanics of rock-jointing, *Amer. J. Sc.*, 259, pp. 481—492.
- Sheldon P. (1912), Some observations and experiments on joint planes, II, *J. Geol.*, 20, pp. 164—183.
- Solomon M. and Hill P. A. (1962), Rib and Hackle-Marks on Joint Faces at Renison Bell, Tasmania; A preliminary note, *J. Geol.*, 70, no. 4, pp. 493—496.
- Woodland B. G. (1964), The Nature and Origin of Cone-in-Cone Structure, *Fieldiana; Geology*, 13, no. 4, Publ. by Chicago Nat. History Museum, pp. 189—305.
- Woodworth J. B. (1897), On the Fracture System of Joints, with Remarks on Certain Great Fractures. *Boston Soc. Nat. History Proc.*, 27, pp. 163—184.

OBJAŚNIENIA TABLIC
EXPLANATION OF PLATES

Tablica — Plate XXXIII

Fig. 1—2. Przełam pierzasty na ścianach obrywów powstały w czwartorzędowych utworach mułowych w następstwie podcięcia przez rzekę. Dolina Wisłoki na pn. od Dębicy. Fot. L. Starkel

- Figs. 1—2. Feather fracture in Pleistocene muds. Disjunctive fissures in river undercuts. Phot. L. Starkel
- Fig. 3. Przełam pierzasty uzyskany doświadczalnie. Zarysy struktur pierzastych zaokrąglone w wyniku wtórnego upływnienia
- Fig. 3. Experimentally produced feather fracture. Feather structures slightly blurred due to partial liquefaction

Tablica — Plate XXXIV

- Fig. 1. Przełam pierzasty na powierzchniach spękań ciosowych we fliszu. Warstwy podmagurskie. Zawoja. Ze zbiorów prof. M. Książkiewicza
- Fig. 1. Feather fracture on joint of flysch sandstones. Sub-Magura beds (Eocene). Courtesy of prof. M. Książkiewicz
- Fig. 2. Przełam pierzasty na ścianach doświadczalnych szczelin wysychania
- Fig. 2. Feather fracture on the surfaces of experimental drying cracks
- Fig. 3—4. Przełam pierzasty uzyskany doświadczalnie. Objaśnienia w tekście
- Figs. 3—4. Feather fracture produced experimentally. Explanations in text

A d d e n d u m. After this paper was sent to the Editor, the present authors came across an important publication by A. Corte and A. Higashi on „Experimental Research on Desiccation Cracks in Soil” published in Cold Regions & Engineering Laboratory Research Report 66, December 1964. In this publication feather fracture on desiccation cracks is described as „interfacial fracture markings”.

